

ACCESS HIRE MARKET-LEADING PRODUCTS

Tired of procuring old, inefficient and poorly maintained access platforms? Well, now there's a better way.

Access Hire are the UK's leading provider of market-leading vehicle mounted access platforms to suit you and your business.

We can even deliver almost anywhere in the UK within 24 hours. So, whether you're looking to secure a single vehicle or a full fleet, we can tailor our service to you – unlike other providers.

In short, why settle for second best?



Kelling Group Limited,
Unit F, Trident Park, Rosie Road,
Normanton, West Yorkshire
WF6 1ZB

01924 245010
info@kellinggroup.co.uk



0845 365 5091
www.accesshirenationwide.com
info@accesshirenationwide.com



0845 600 6670
www.welfarehire.co.uk
info@welfarehire.co.uk



“THE UK'S LEADING
PROVIDER
OF VEHICLE
MOUNTED ACCESS
PLATFORMS”

MARKET-LEADING VEHICLE MOUNTED ACCESS PLATFORMS

There are countless reasons why you should choose Access Hire, part of the Kelling Group. But to save you time, we've drilled it down to **four crucial, key benefits**, all of which will transform your business projects today. After all, why would you ever settle for second best?

At the Kelling Group, we pride ourselves on offering a product range that appeals to all areas of our customers' businesses. Our well invested, most fuel-efficient vehicles possible are always well received by board directors with an active CSR policy, while our high quality products and premium levels of customer service and nationwide support are extremely popular with the end users. Plus, procurement teams love the fuel and cost savings that our product portfolio can unlock.



QUALITY

Market leading products... always



SERVICE

Premium levels of customer service with nationwide support



ENVIRONMENT

Regularly renewed fleet to provide the most fuel-efficient vehicles possible



VALUE

The most competitive rates



ALL OUR VAN MOUNTED PLATFORMS OFFER AS STANDARD:

- / Emergency stop at platform and pedestal
- / Full functions at ground with 5m wander lead
- / Ply lined
- / Roof beacons
- / Chapter 8 livery

3.5T – 12.9M VAN MOUNTED PLATFORM

TYPICAL ACCESS PLATFORM SPECIFICATIONS

Maximum working height	12.9m
Maximum platform height	10.9m
Maximum outreach	7.3m
Vehicle GVW	3,500kg
Fly boom standard	110°
Non continuous rotation	360°
Boom travel	7° - 80°

ADDITIONAL STANDARD FEATURES


/ Racking

OPTIONAL EXTRAS


- / Reverse camera
- / Hand wash station
- / Reverse alarm



3.5T - 12.9M Van Mounted Platform

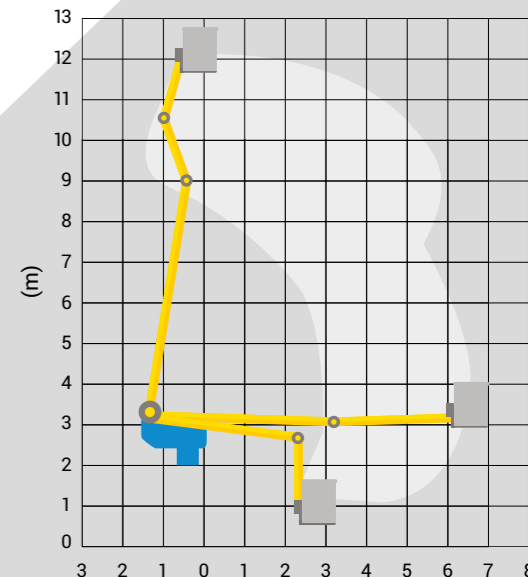

OPERATING ENVELOPE (m)

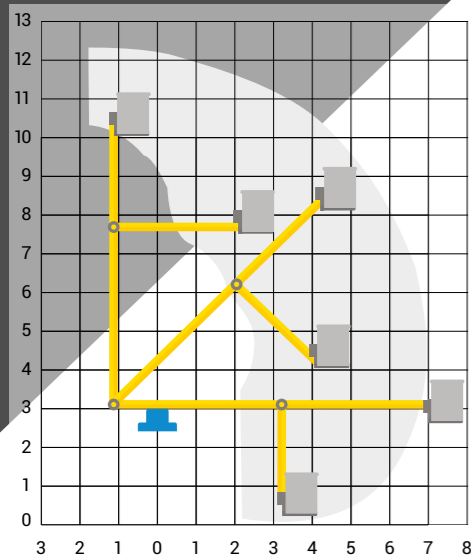

OPERATING ENVELOPE



5.2T – 12.5M VAN MOUNTED PLATFORM

TYPICAL ACCESS PLATFORM SPECIFICATIONS

Maximum working height	12.5m
Maximum cage floor height	10.5m
Maximum outreach	7.2m
Outreach at 200kg S.W.L	7.1m
Maximum platform S.W.L	200kg
Vehicle GVW	5,200kg
Wheelbase	3,300mm
Spare load capacity up to	1,300kg

ADDITIONAL STANDARD FEATURES

- / Emergency stop, duplicated at cage and base
- / Manual emergency pump and emergency electro-hydraulic device
- / Racking
- / Reverse camera
- / Reverse alarm

OPTIONAL EXTRAS

- / Hand wash station
- / External ladder rack

5.2T – 12.5M Van Mounted Platform

5.2T – 14.2M VAN MOUNTED PLATFORM

TYPICAL ACCESS PLATFORM SPECIFICATIONS


Maximum working height	14.2m
Maximum cage floor height	12.2m
Maximum outreach	7.5m
Maximum platform S.W.L	200kg
Vehicle GVW	5,200kg
Wheelbase	3,226mm
Spare load capacity up to	1,300kg

ADDITIONAL STANDARD FEATURES

- / Emergency operation of all boom functions by 12V power pack
- / Emergency retractable stabilisers in case of engine failure
- / Manual slew facility
- / Dual controls platform and ground
- / Engine stop / start at platform
- / Racking
- / Reverse camera
- / Reverse alarm

OPTIONAL EXTRAS

- / Hand wash station
- / External ladder rack

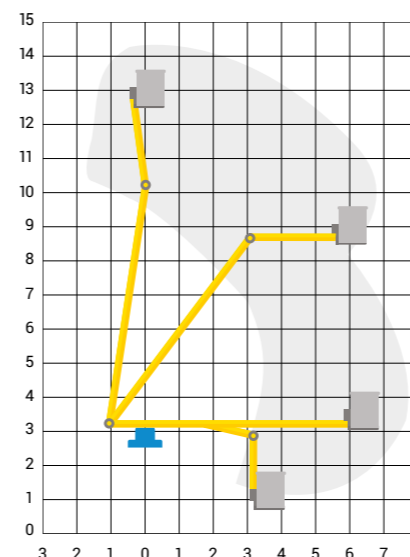

OPERATING ENVELOPE



5.2T – 14.2M Van Mounted Platform

7T – 16.5M VAN MOUNTED PLATFORM

TYPICAL ACCESS PLATFORM SPECIFICATIONS

Maximum working height	16.5m
Maximum cage floor height	14.5m
Maximum outreach	8.2m
Maximum platform S.W.L	200kg
Vehicle GVW	7,000kg
Wheelbase	3,950mm
Spare load capacity up to	2,300kg

ADDITIONAL STANDARD FEATURES


- / Emergency operation of all boom functions by 12V power pack
- / Dual controls platform and ground
- / Engine stop / start at platform
- / Racking
- / Reverse camera
- / Reverse alarm

OPTIONAL EXTRAS

- / Hand wash station
- / External ladder rack



7T - 16.5M Van Mounted Platform

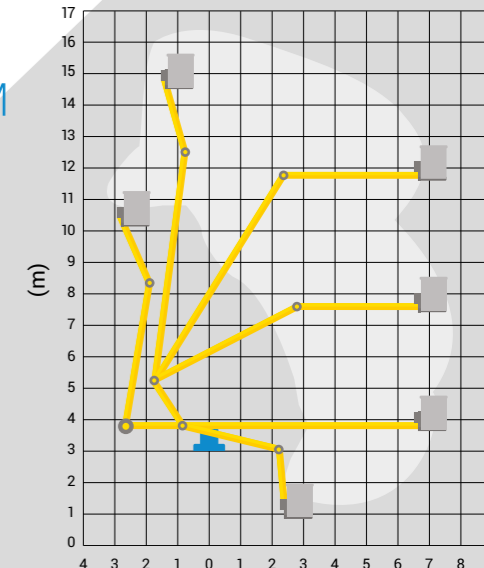

OPERATING ENVELOPE (m)




3.5T – 13.2M 4X4 VEHICLE

TYPICAL ACCESS PLATFORM SPECIFICATIONS

Maximum working height	13.2m
Maximum cage floor height	11.2m
Maximum outreach	6.5m
Rotation degrees	360°
Spare load capacity up to	225kg

STANDARD FEATURES

- / 4 x A frame hydraulic outriggers
- / 2 person plastic basket
- / Fully hydraulic controls fitted in basket and on deck
- / Emergency stop / start from basket and on deck
- / Roof beacons
- / Chapter 8 livery as standard

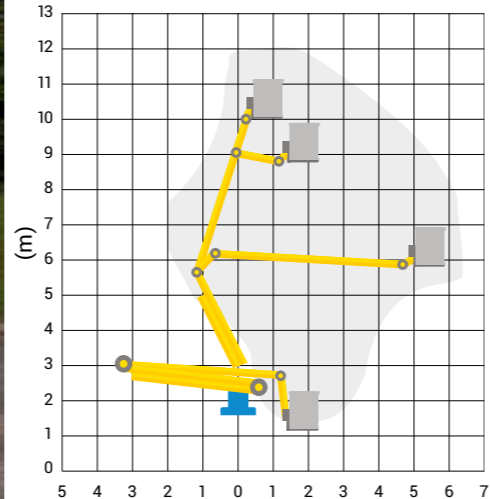

OPERATING ENVELOPE (m)

7.5T – 18T POLE ERECTION UNITS

TYPICAL SPECIFICATIONS

- Rear or front mounted crane
- Front and rear gantries
- Dropside body
- Two rear facing high density beacons
- Two work lights rear facing and two recessed high density beacons front facing

STANDARD FEATURES

- / 8 flush floor mounted lashing rings
- / Plywood front headboard
- / Triple aluminium plank sideboards 50mm in depth
- / Front gantry with pole dividers and pole grips
- / Rear gantry to form end of body with adjustable pole dividers and pole grips
- / Tool lockers to be mounted on underside of body on both sides of chassis, one between crane and rear axle and one from rear axle to end of body
- / Approx size (cm) 120 x 50 x 50 with locking handles
- / Aluminium side under run bars with grip top, thermoplastic wings with spray
- / Suppression mud flaps, rear marker plates, LED side marker lights and rear LED marker lights
- / Chapter 8 livery as standard

